
Technical Sheet

END
Multi Angle Bracket

END type angle brackets have been completely redesigned for greater versatility in their applications.

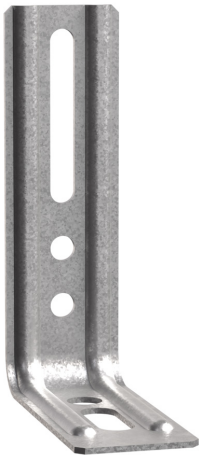

Features

Material

- Galvanized steel S250GD + Z275 according to NF EN 10346.

Benefits

- Wide variety of uses.
- Wood to wood or wood to concrete.
- Oblong slot for simpler alignment and adjustment.


Applications


Header member

- **Supporting member:** wood, concrete, steel, etc.
- **Supported member:** PVC, wood, aluminium, steel joinery, etc.


For Use With

- Fastening of interior and exterior joinery, etc.






Timber to masonry connection




Timber to masonry connection





END





Timber to masonry connection

Technical Sheet

END
Multi Angle Bracket

Technical Data





Dimensions and Allowable values

Reference	Connector Dimensions								
	Product Dimensions[mm]				Joist		Flange B		Other
	A[mm]	B[mm]	C[mm]	Thickness[mm]	Obround	Round Ø6.5	Obround	Round Ø9	Weight[kg]
END55/1.5	55	71.5	30	1.5	-	-	-	1	0.036
END100/1.5	100	71.5	30	1.5	-	2	-	1	0.05

Installation

Fixing

On wood:

- CNA annular ring-shank nails 4.0 mm.
- CSA screw 5.0 mm.

On concrete:


- HIPC 8-60/20 drive anchors.

On metal:


- Bolts dia. 8 mm.

Installation

- Use appropriate screws.



Timber to masonry connection



Timber to masonry connection

Winchester Road Cardinal Point Tamworth Staffordshire
B78 3HG
tel: +44 1827 255600
fax: +44 1827 255616
Copyright by Simpson Strong-Tie®
Information presented on this document is the exclusive property of Simpson Strong-Tie®