
Technical Sheet


SSWSCB

SSWSCB TILE ROOFING Screw, Coarse Thread

SSWSCB is a stainless steel screw with a bugle head, coarse thread and a type 17 point. It is ideally suited to fastening roof tiles to wood.





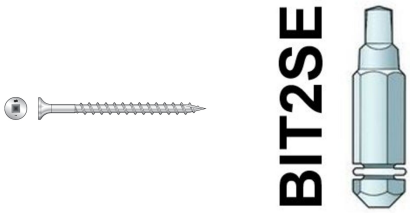



Features

Material

- Stainless steel A2

Benefits

- Bugle head
- Tapered point
- Corrosion resistant material

Applications

Header member

- Softwood (Cedar, Spruce, Larch, Pine, Fir, Tsuga...)

Applications

- Tile roofing

Technical Sheet

SSWSCB

SSWSCB TILE ROOFING Screw, Coarse Thread

Technical Data



Dimensions and caracteristics values

Reference	Fasteners Dimensions[mm]						
	Product Dimensions[mm]			QD information			Other
	Head diameter[mm]	Thread diameter[mm]	Length of the screw[mm]	Screws per band	Compatible devices	Max. rotational speed[tr/min]	Screws per case
SSWSCB64E	8.5	4.6	64	30.0	QDPR064 / QD76 / QDPR076S	2500	1500.0

Mechanical properties (EN14592)

Reference	Screw Parameters				
	Characteristic parameters				
	Characteristic moment of elasticity - My,k[Nm]	Characteristic pullout parameter[N/mm²]	Characteristic head traversal parameter[N/mm²]	Characteristic pulling capacity[kN]	Characteristic resistance to torsion - $R_{tor,k}$[Nm]
SSWSCB64E	2.6	14	16	4.7	4.2

SSWSCB
SSWSCB TILE ROOFING Screw, Coarse Thread

Options





Single Thread



Selfdrilling pin

Winchester Road Cardinal Point Tamworth
Staffordshire B78 3HG
tel: +44 1827 255600
fax: +44 1827 255616

Copyright by Simpson Strong-Tie®
Information presented on this document is the exclusive property of Simpson Strong-Tie®
It is valid only when associated with products supplied by Simpson Strong-Tie®