
Technical Sheet

WSTC
Stainless Steel Cavity Wall Tie

The WSTC is a screw-in cavity wall tie suitable for connecting a new leaf of masonry to an existing structure.

- *Supplied with nylon wall plug and neoprene 'O' ring*
- *Suits cavities 50 to 125mm*
- *CE marked to EN845-1:2013*



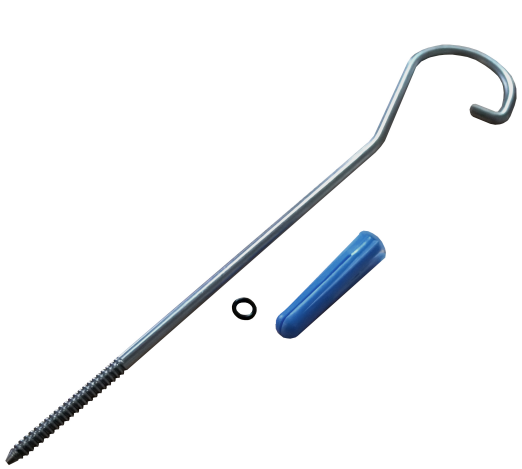

Features

Material

- Wall tie: austenitic stainless steel
- Wall plug: nylon
- 'O' ring: neoprene

Applications

Applications

- Inner leaf walls for existing structures such as barn conversions.

WSTC
Stainless Steel Cavity Wall Tie

Technical Data

WSTC Performance Values

Reference	Connector Dimensions				Masonry capacity				
	Header dimensions	Product Dimensions[mm]			Characteristic Capacity[N]				
					Tension		Shear		
	Cavity Width[mm]	Tie Length[mm]	T_I[mm]	t[mm]	Tensile Strength: 1mm Serviceability[N]	Ultimate Declared Tensile Strength[N]	Shear Strength: 1mm Serviceability[N]	Ultuimate Declared Shear Strength[N]	Compressive Strength at 1mm Displacement[N]
WSTC180	50 - 75	180	38	Ø5	1150	1560	1860	2250	1011
WSTC200	76 - 100	200	38	Ø5	1150	1560	1860	2250	1011
WSTC230	101 - 125	230	38	Ø5	1150	1560	1860	2250	1011

Installation

Installation

- Tie should be fixed into brickwork, blockwork or stone
- Tie must be installed horizontally
- Drill a hole for the wall plug (Ø10 x 45mm) and insert the nylon wall plug
- Slide the neoprene ‘O’ ring onto the tie and screw into the plug
- Build the tie into the new leaf of blockwork ensuring that it is surrounded by mortar

Winchester Road Cardinal Point Tamworth
Staffordshire B78 3HG
tel: +44 1827 255600
fax: +44 1827 255616
Copyright by Simpson Strong-Tie®
Information presented on this document is the exclusive property of Simpson Strong-Tie®