

Technical Sheet


SPR
Timber Joist Hanger Slope Adjustable

The SPR connector supports rafters from other timber members and can be sloped up or down by up to 45 degress.

- *Slope angle can be adjusted on-site.*
- *Adjustable between 0 and 45 degree, up and down.*
- *supports a range of timber heights from 145mm to 250mm.*

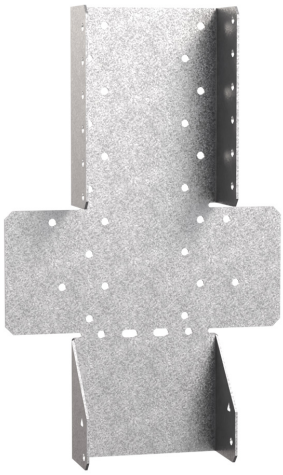

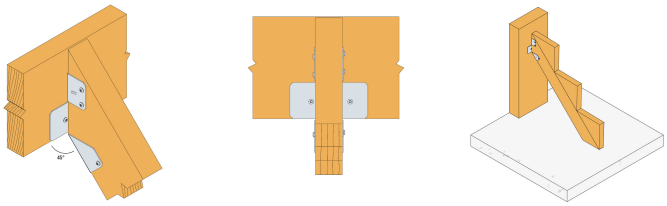

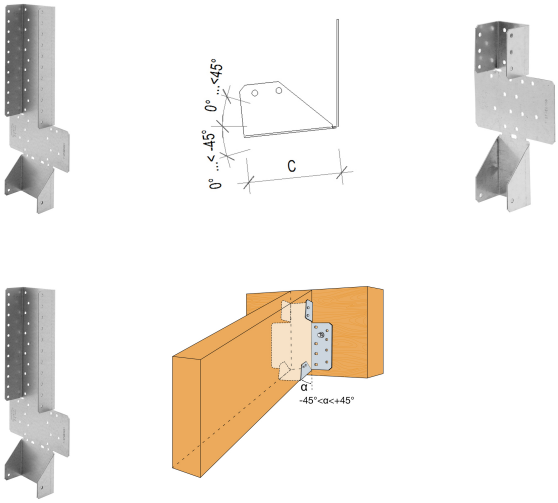

Typical Installation

Features

Material

- Galvanized steel S250GD + Z275 according to NF EN 10346.

Applications

For Connecting

- **Supporting member:** solid wood, composite lumber, glued-laminated wood, concrete, steel.
- **Supported member:** solid wood, composite lumber, glued-laminated wood.

Applications


- Joists,
- Purlins,
- Smooth beams...

Technical Sheet

SPR
Timber Joist Hanger Slope Adjustable

Technical Data


Product dimensions




Reference	Connector Dimensions														
	Other		Timber size[mm]				Product Dimensions[mm]						Header holes	Joist holes	
	Qty per Box	Weight[kg]	Height		Width		A[mm]	B[mm]	C[mm]	D[mm]	F[mm]	t[mm]	Round	Traingular[mm]	Round
			Min[mm]	Max. [mm]	Min[mm]	Max. [mm]							Ø5[mm]		Ø5[mm]
SPR47/140	30	0.31	145	200	45	47	47	140	74	43	78	1.5	13	2	8
SPR47/200	30	0.4	200	250	45	47	47	200	74	43	78	1.5	17	2	14
SPR91/140	20	0.421	145	200	89	91	91	140	74	43	78	1.5	18	2	8
SPR91/200	20	0.545	200	250	89	91	91	200	74	43	78	1.5	24	2	14

The lower heel of the joist hanger must be bent only once along the desired angle α.
The height of joist is dependet on the slope.

Product characteristic capacities - Timber beam to timber beam





Reference	Hanger capacity			
	Characteristic capacities - Timber to timber - Full nailing			
	Number of Fasteners		Product characteristic capacities - Timber C24[kN]	
	Header	Joist	$R_{1,k}$	$R_{2,k}$
	Qty	Qty	N3.75x30	N3.75x30
SPR47/140	13.0	10	6	6
SPR47/200	17.0	16	12.2	12.2
SPR91/140	18.0	10	8.3	8.3
SPR91/200	24.0	16	14.5	14.5

number in ( ) are the number of square twist nails N3,75x30

Installation

Fasteners

On supported member:


- Square twist nails N3,75x30

On supporting member:
Wood substrate:


- Square twist nails N3,75x30

Installation

- Use all specified fasteners.
- Bend only once.
- To ensure proper seat installation, install the bottom nails prior to the side nails.
- Attach the sloped joist at both ends so that the horizontal force developed by the slope is fully supported by the carried members.



Typical Installation



Winchester Road Cardinal Point Tamworth
Staffordshire B78 3HG
tel: +44 1827 255600
fax: +44 1827 255616

Copyright by Simpson Strong-Tie®
Information presented on this document is the exclusive property of Simpson Strong-Tie®
It is valid only when associated with products supplied by Simpson Strong-Tie®